



KROHNE

▶ *achieve more*

Always a good solution

Overview of process instrumentation and measurement solutions

Contents

3	Company profile
4	Global presence
5	Development and production sites
6-17	Flowmeters and flow controllers
8-9	Electromagnetic flowmeters
10-11	Mass flowmeters
12-13	Ultrasonic flowmeters
14-15	Variable area flowmeters
16-17	Vortex flowmeters
16-17	Mechanical and electromagnetic flow controllers
18-29	Level meters and level switches
20-21	FMCW radar level meters
22-23	TDR guided radar level meters
24-25	Ultrasonic level meters
26-27	Magnetic bypass level meters
26-27	Displacer level meters
26-27	Potentiometric level meters
28-29	Vibration level switches
28-29	Conductive level switches
28-29	Electromagnetic level switches
30-35	Temperature meters
32-33	Thermometers
34-35	Temperature transmitters
36-45	Analysis products
38-39	SMARTSENS analytical sensors with integrated transmitter technology
40-41	Water analysis
42-43	Wastewater analysis
42-43	Analysis for hygienic applications
44-45	Analysis systems for the food & beverage industry
46-47	Communication technology
48-49	Products and systems for the oil & gas industry
50-51	Measuring systems for the marine industry
52-53	KROHNE services
54-55	Calibration

KROHNE trademarks
used in this brochure:

KROHNE
AST
CalSys
CARGOMASTER
Configure it
EcoMATE
KROHNE Care
OPTIBATCH
OPTIFLEX
OPTIFLUX
OPTIMASS
OPTISONIC
OPTISOUND
OPTISWIRL
OPTISWITCH
OPTIWAVE
WATERFLUX

Trademarks
of other owners:
Amphenol
FDT Group
FOUNDATION fieldbus
HART
HASTELLOY
Metaglas
PACTware
PROFIBUS
VARINLINE



Company profile

KROHNE is a world-leading manufacturer and supplier of solutions in industrial process instrumentation.

Since we were founded in 1921, we have steadily grown into a global enterprise. Today, we employ more than 3,000 people.

Our aim is to always meet or surpass the needs and expectations of every customer by:

- Manufacturing innovative, reliable, high-quality products and services
- Employing qualified and motivated people
- Listening and responding to our customers' needs
- Maintaining long-term relationships with our business partners

When it comes to process measurement, our level of expertise is unique, not just in standard applications but also for those challenges that demand customized solutions.

Talk to us about your measurement challenges now. We would be delighted to tell you more about what we can offer.

Global presence

When you are a global enterprise, you want the people you are dealing with to have the same kind of reach. KROHNE has 15 production facilities, owns 43 companies and joint ventures and works with 55 exclusive representatives worldwide. This means you can deal with a contact or a local office wherever you are.

Find your local contact at www.krohne.com



Working with people like you gives us a wealth of experience or, as we call it, application knowledge.

This means we have a good idea where to look if you have a measuring task that can't be met by an existing product. We will analyse the problem and come up with a way forward. Our ability to do this time after time is one of the very good reasons we are trusted by customers worldwide.

The industries we serve include:

- Chemical & petrochemical
- Food & beverage
- Heating, ventilation & air conditioning (HVAC)
- Iron, steel & metal
- Marine
- Minerals & mining
- Oil & gas
- Pharmaceutical
- Power generation
- Pulp & paper
- Water & wastewater



Manufacturing of converters in Duisburg, Germany



Production of ultrasonic flowmeters in Dordrecht, the Netherlands

Development and production sites

Headquartered in Duisburg, Germany, KROHNE has a large network of development and production sites who specialise in manufacturing different parts of our product range:

- Breda, the Netherlands: oil & gas metering skids, custody transfer products, leakage detection and localisation systems, flow computers, asset management systems
- Brevik, Norway: cargo handling and ballast monitoring systems for marine applications
- Chengde, China (joint venture): variable area flowmeters, vortex flowmeters, level meters
- Dordrecht, the Netherlands: electromagnetic flowmeters, ultrasonic flowmeters
- Duisburg, Germany: variable area flowmeters, vortex flowmeters, radar level meters, converter electronics for all devices, analysis products
- Malmö, Sweden: thermometers, temperature sensors and transmitters
- Neuss, Germany: spectroscopic analysis systems
- Petaling Jaya, Malaysia: oil & gas metering skids
- Pune, India (joint venture): vortex flowmeters, variable area flowmeters, electromagnetic flowmeters
- Romans-sur-Isère, France: radar and guided microwave level meters, mechanical level meters, level switches
- Samara, Russia: ultrasonic flowmeters
- São Paulo, Brazil (joint venture): electromagnetic flowmeters
- Shanghai, China (joint venture): electromagnetic flowmeters, mass flowmeters
- Shanghai, China: electromagnetic flowmeters, mass flowmeters
- Wellingborough, United Kingdom: mass flowmeters

At KROHNE, we have a thorough quality and sustainable development policy applied and integrated into all levels of organisation. Available certifications and declarations include:

- Quality management: all KROHNE feeder factories are ISO 9001 certified
- Certified calibration standards (see chapter "Calibration")
- Welding certifications (ISO 3834)
- Certified environmental management system (ISO 14001)
- Nuclear power certifications: ASME, KTA, I.S.C.I.R., CIS accreditation
- Industry-related certifications: ATEX, IECEx, FM, NEPSI, EHEDG, HART, FOUNDATION fieldbus ITK, GOST, SIL, Achilles JQS, NSF, OHSAS etc.

For more information about quality management and certifications, please visit www.krohne.com

A close-up photograph of a grey metal panel, likely part of a flowmeter or controller. The panel is secured with several screws. A blue arrow points to the right in the upper left corner. A blue rectangular logo with the word 'KROHNE' in bold, blue, sans-serif capital letters is positioned in the lower right area of the panel. The background is a light, neutral color.

Flowmeters and flow controllers

Electromagnetic flowmeters · Mass flowmeters · Ultrasonic flowmeters ·
Variable area flowmeters · Vortex flowmeters · Flow controllers

Move into the lead: Flowmeters and flow controllers

KROHNE offers a comprehensive range of world-class flowmeters:

- Every flowmeter is wet-calibrated
- We hold over 1,000 patents relating to flow products
- All flowmeters come with the relevant approvals

Our flowmeters are used in just about every type of plant and processes around the world. The expertise we have gained, spanning installation effects, different mediums and meter performance under real process conditions, adds value to every KROHNE meter you purchase.

We are more than capable of handling standard applications, as well as overcoming particularly tough challenges in enterprising ways.

Due to their repeatability and accuracy, our flowmeters are installed as reference meters on standard liquid flow calibration rigs of national metrology institutes such as PTB (Germany), NMI/EuroLoop (the Netherlands) and NMIJ (Japan).

Over 90 years' experience:

1921

Ludwig KROHNE starts manufacturing variable area flowmeters in Duisburg, Germany, to measure the flow of air, gases and liquids.

1952

The first electromagnetic flowmeter (EMF) for industrial measurement is launched.

1981

First EMF with measuring tube made of oxide ceramics and sintered platinum electrodes.

1994

First straight tube Coriolis meter.

1996

First ultrasonic meter for custody transfer of liquids in the world.

2006

The first vortex flowmeter with integrated pressure and temperature compensation.

2008

ALTOSONIC V12, the first 12-chord ultrasonic gas flowmeter with compensating and diagnostic functions.

2010

WATERFLUX EMF with rectangular cross-section allows installation without straight inlets and outlets.

The modular product line

Converters



IFC 050 C
Basic applications
(Display/Blind)



IFC 050 W
Wall-mounted
(Display/Blind)



IFC 100 W
Wall-mounted



IFC 100 C
Standard applications



IFC 300 C
General purpose



IFC 300 F
Field housing



IFC 300 R
Rack-mounted



IFC 300 W
Wall-mounted

Flow sensors



OPTIFLUX 1000
The economic solution with standard functionality



OPTIFLUX 2000
The all-round solution for the water and wastewater industry



WATERFLUX 3000
The solution for measuring small and large flows without requiring inlets or outlets



OPTIFLUX 4000
The standard solution for the process industry



OPTIFLUX 5000 flange
Ceramic measuring tube: maximum media and abrasion resistance and accuracy



OPTIFLUX 6000
The solution for the food and pharmaceutical industry

The specialists



OPTIFLUX 4040 C
2-wire device



OPTIFLUX 7300 C flange
With non-wetted capacitive electrodes and ceramic liner



TIDALFLUX 2300 F
For partially filled pipes, Ex Zone 1



BATCHFLUX 5500
For volumetric filling systems in the beverage industry

Battery-powered water meters



WATERFLUX 3070 C
Compact version



WATERFLUX 3070 C
Compact version, protection rating IP68



WATERFLUX 3070 F
Subsoil installation sensor (protection rating IP68 plus additional protective coating)

Electromagnetic flowmeters

The measurement principle of electromagnetic flowmeters (EMF) is based on Faraday's law of induction. EMF can measure the volume flow of any electrically conductive liquid medium, even those with low conductivities.

Typical applications include:

- Water industry: revenue metering, district metering, water abstraction, leakage detection
- Wastewater industry: transport networks, sewage treatment plants, sludges
- Food & beverage industry: mixing, dosing and filling of drinks under hygienic conditions, filling systems applications
- Chemical industry: acids, alkalis, dosing applications, abrasive or corrosive mediums
- Pulp & paper industry: pulp, pastes, sludges and other caustic mediums, liquor, additives, bleaches, colourants
- Metal & mining industry: mediums with a high solid content, like ore or excavator mud

OPTIFLUX 4300 in the filtration system in city waterworks



Highlights:

- Minimal or no inlets/outlets
- All KROHNE EMF are wet-calibrated in a direct comparison of volumes
- Large choice of liner materials suitable for potable water, wastewater, chemicals, SIP/CIP and solids
- Suitable for use in custody transfer applications
- Measurement is independent of the flow profile
- Abrasion and corrosion-resistant liners available
- Ceramic measuring tubes and liners available for flange and sandwich versions, also with non-wetted electrodes (capacitive flowmeter)
- Specific models for partially filled pipes
- Virtual reference option: grounding electrodes and grounding rings can be left out
- Electric conductivity of medium can be used for detection of product change
- For high bubble content, high solids content and pulsating flow
- Secure handling of rapid medium changes and pH jumps
- Zero-point stability regardless of changes in medium properties
- Nominal sizes DN 2.5 to 3,000
- 3x100% diagnostics (application and device diagnostic, out-of-spec test) exceeds NAMUR requirements

Highlights:

- Not susceptible to installation effects: can be installed regardless of type of installation (no straight inlets/outlets) and external influences such as tube vibrations
- Only straight tube measuring devices for custody transfer applications in the highest OIML accuracy class of 0.3, approved to OIML R117/MID
- Flow rates from 0.0003 to 2,300 t/h
- Minimal pressure loss with straight tube measuring devices: reduced power consumption of pumps
- High density accuracy, not affected by medium and temperature changes
- Suitable for highly viscous mediums, inhomogeneous mixtures, mediums with solid content or gas inclusions
- Modular design for quick and easy replacement of electronics and/or flow sensors
- Self-draining and easy to clean
- OPTIMASS 7000 suitable for highly sensitive mediums as well as mediums requiring low flow velocity
- Variety of wetted materials (e.g. for corrosive mediums): titanium, stainless steel, HASTELLOY®, tantalum, duplex & super duplex
- Options for secondary containment up to 100 bar/1450 psi (OPTIMASS 2000 up to 150 bar/2176 psi)
- Turnkey solutions for the operation of batch plants

Mass flowmeters

The function of mass flowmeters is based on the Coriolis principle. They allow for a direct measurement of mass flow, density and temperature of liquids and gases as well as calculation of volume flow and mass or volume concentration with a single device.

Typical applications include:

- Chemical: measurement of concentration or density, bulk loading, batching to reactors, hydrocarbon cracking, aggressive, abrasive or viscous mediums or mediums of unknown composition
- Food & beverage: filling machine applications, measurement of degrees Brix, flow, density, specific gravity, additive components dosing
- Pharmaceutical: batching, dosing and filling, solvent extraction ultra-pure water measurement
- Water & wastewater: flocculent dosing, sludge flow and density measurement
- Pulp & paper: paper stock, pulp, additives, bleaches, colourants
- Oil & gas: metering skids, bypass density measurement, CNG/LPG dispensers, leak detection, custody transfer applications such as tanker loading, bunkering and pipeline transfer

OPTIMASS 2000 – Minimal installation footprint



The modular product line

Converters



MFC 300 C/MFC 400 C
General purpose



MFC 300 F/MFC 400 F
Field housing



MFC 300 W
Wall-mounted



MFC 300 R
Rack-mounted



MFC 010
Modbus converter
for economical OEM
system integration

Flow sensors



OPTIMASS 1000
The standard device
with an excellent price-
performance ratio



OPTIMASS 2000
The first choice for bulk
flows for custody transfer



OPTIMASS 3000
Suitable for extremely
low flow rates



OPTIMASS 6000
The standard high-
performance meter for
the process industry



OPTIMASS 7000
High-end solution
featuring a single straight
measuring tube

The specialists



OPTIGAS 4010/5010
Specially designed for CNG and
LPG in dispensing systems



OPTIBATCH 4011
Specially designed for linear
and rotating filling machines

Process measuring technology



OPTISONIC 7300
Universal 2-beam device for inline measurement of process gases



UFM 3030
Universal 3-beam device for inline measurement of liquids



UFM 530 HT
Rugged 2-beam high-temperature device for extreme process conditions



OPTISONIC 6300
Flexible clamp-on device with industrial clamp-on mechanism



OPTISONIC 6300 P
Battery-powered portable clamp-on device

Custody transfer



ALTOSONIC III
Cost-effective 3-beam device to measure light products for custody transfer



ALTOSONIC V12
12-beam device for measuring gas for custody transfer



ALTOSONIC V
5-beam device for measuring crude oil and crude oil products for custody transfer



Process gas measurement
with OPTISONIC 7300

Ultrasonic flowmeters

Using the transit time method, ultrasonic flowmeters measure liquid and gaseous mediums.

Typical applications include:

- Power plants: cooling water and demineralised water, steam, thermal oil (HTF), molten salt
- Chemical industry: metering of liquid hydrocarbons and low-conductivity liquids, including feedstock, solvents, chemical addition in reactor control metering, demineralised water
- Petrochemical refineries: feedstock, cooker feed flow, cracking, desulphurisation, residues, blending of crude oil and refined product
- Petrochemical plants: feedstocks (e.g. naphtha and natural gas), (intermediate) products such as ethylene, propylene, solvents
- Oil & gas industry: measurement of crude oil and refined product, natural gas, liquefied natural gas (LNG) and biogas; standard and custody transfer applications in production, pipeline transfer and leak detection, loading and off-loading, storage and distribution
- Water/utilities: demineralized water, water purification, effluent, compressed air
- HVAC: metering of chilled water and hot water for (custody transfer) energy measurement

Highlights:

- Complete portfolio for liquid, gas and steam applications
- Accuracy and reproducibility regardless of medium properties such as viscosity, temperature, density and electrical conductivity
- Diagnostic and compensation functions for disturbed flow profiles and deposits
- No moving parts or components that protrude into the measuring tube
- Low operating and maintenance costs due to non-wearing parts
- Excellent long-term stability, no recalibration required
- High degree of reliability thanks to redundant measuring paths
- High-temperature versions available
- Large dynamic range
- Bi-directional flow measurement
- Replaces mechanical meters such as turbines, orifice plates, venturis for a lower overall uncertainty of measured values

Highlights:

- Local indication without the need for auxiliary power
- Use in hazardous areas
- Accurate measurement even at very low flow rates (<0.5 l/h)
- Extended turndown ratio up to 100:1
- Suitable for low operating pressures
- Can be used even with short or no straight inlets/outlets
- Modular display and measuring transducer concept: easy component replacement
- World's only all-metal variable area flowmeter with EHEDG certification
- Flowmeters for nuclear power plants meet requirements of KTA 1401, RCC-E, RCC-M and ASME Section III and we are authorized to manufacture products with ASME N stamp and NPT stamp
- SIL 2 certified
- Any meter orientation possible: vertical, horizontal or in fall pipes
- Optional limit switches, current output, totalizer, communication interfaces

Variable area flowmeters

Variable area flowmeters are suitable for measuring pure liquids and gases. They have an upright conical tube made of metal, glass or plastic, in which a float moves freely up and down. The flow through the tube causes the float to rise until the forces are in equilibrium.

Typical applications include:

- Measurement and dosing of additives such as catalysts, surfactants, foam and corrosion inhibitors, caustic soda, chlorine or sulphur substances, etc.
- Inerting of tanks or containers
- Measurement and dispensing of rinsing mediums (purge meters)
- Sample feed measurement for analyser systems
- Dosing and monitoring of lubricants and coolants for bearings and seals for process pumps and rotating machinery
- Hygienic applications in the food and pharmaceutical industries
- Measurement of gases and chemicals in laboratories and test facilities
- Gas/oil burner consumption measurement

Measuring the flow of CO₂ in the inlet lines of storage tanks at Eckes-Granini, Germany



Glass devices



DK46, 47, 48, 800
Small and compact dosing meters with valve



VA40
All-purpose flowmeter with various process connections

Metal devices

DK32, 34, 37
With mechanical or electronic indicator and metering valve to set flow value accurately



H250 M40
The new standard device, explosion-proof and intrinsically safe



H250 M9
The proven-in-use, intrinsically safe solution for the process industry

Vortex flowmeters



OPTISWIRL 4070 C flange
The universal device with standard integrated temperature compensation for saturated steam



OPTISWIRL 4070 C sandwich
The first vortex flowmeter with integrated pressure and temperature compensation



Stainless steel centering rings for easy mounting



OPTISWIRL 4070 F
Remote version with field housing converter with connecting cable up to 15 m/49 ft

Mechanical flow controllers



DW 181
Inline flow controller,
process connection
3/4...2" NPT, G3/4...2

DW 182
Inline flow controller,
process connection
DN15...65,
1/2...2 1/2" ASME

DW 183
Inline flow controller,
process connection
DN65...200, 3...8" ASME

DW 184
Insertion-type flow
controller for pipe
diameter ≥ 250 mm /10",
process connection
DN150, 6" ASME

Electromagnetic flow controllers



DWM 1000
Monitoring unit with
binary output

DWM 2000
Flowmeter with
4...20 mA output

Vortex flowmeters

Vortex flowmeters are based on the principle of the Kármán vortex street and are used in main as well as auxiliary and supply processes.

Capable of compensating for different temperature and pressure conditions, they measure the volume flow of both conducting and non-conducting liquids, industrial gases and steam.

Applications include measurement of:

- Saturated steam and superheated steam
- Hot steam, also for CIP and SIP processes
- Liquefied gas, wet gas and flue gas
- Demineralised water and boiler feed water
- Solvents and heat transfer oil
- Steam boiler monitoring
- Compressor output
- Consumption in compressed air systems
- Burner consumption

Mechanical flow controllers

Mechanical flow controllers work via a spring-mounted baffle that changes its position as flow increases. Adjustable switches generate alarms once switching points are reached.

Typical applications include:

- Local indication of flow without power supply – cooling systems, pump protection, lubrication control or cavitation alarm, for instance

Electromagnetic flow controllers

Based on Faraday's law of induction, electromagnetic flow controllers monitor or measure the flow speed of electrically conductive liquids.

Typical applications include:

- Largely homogenous liquids, pastes, suspensions and sludges, even with solid content

Highlights of vortex flowmeters:


- Integrated pressure and temperature compensation for fluctuating pressures and temperatures
- Temperature compensation for saturated steam included as standard
- Gross heat measurement for steam
- Non-wearing, fully-welded stainless steel construction with high resistance to corrosion, pressure and temperature

Highlights of mechanical flow controllers:

- One limit switch (dry reed contact) as standard, second switch can be added
- For horizontal or vertical pipelines
- Available with screw-type, flange or mounting flange connectors
- Tropical version with Amphenol® sockets and a double coating of epoxy on device
- Additional amplifying relay for switching energies of up to 1200 VA

Highlights of electromagn. flow controllers:

- Minimum conductivity 20 $\mu\text{S}/\text{cm}$
- Sturdy construction, no moving parts
- Parts in contact with medium made of stainless steel and ceramic
- Electronic unit can be replaced under operating conditions
- For pipelines $\geq \text{DN } 25/1''$

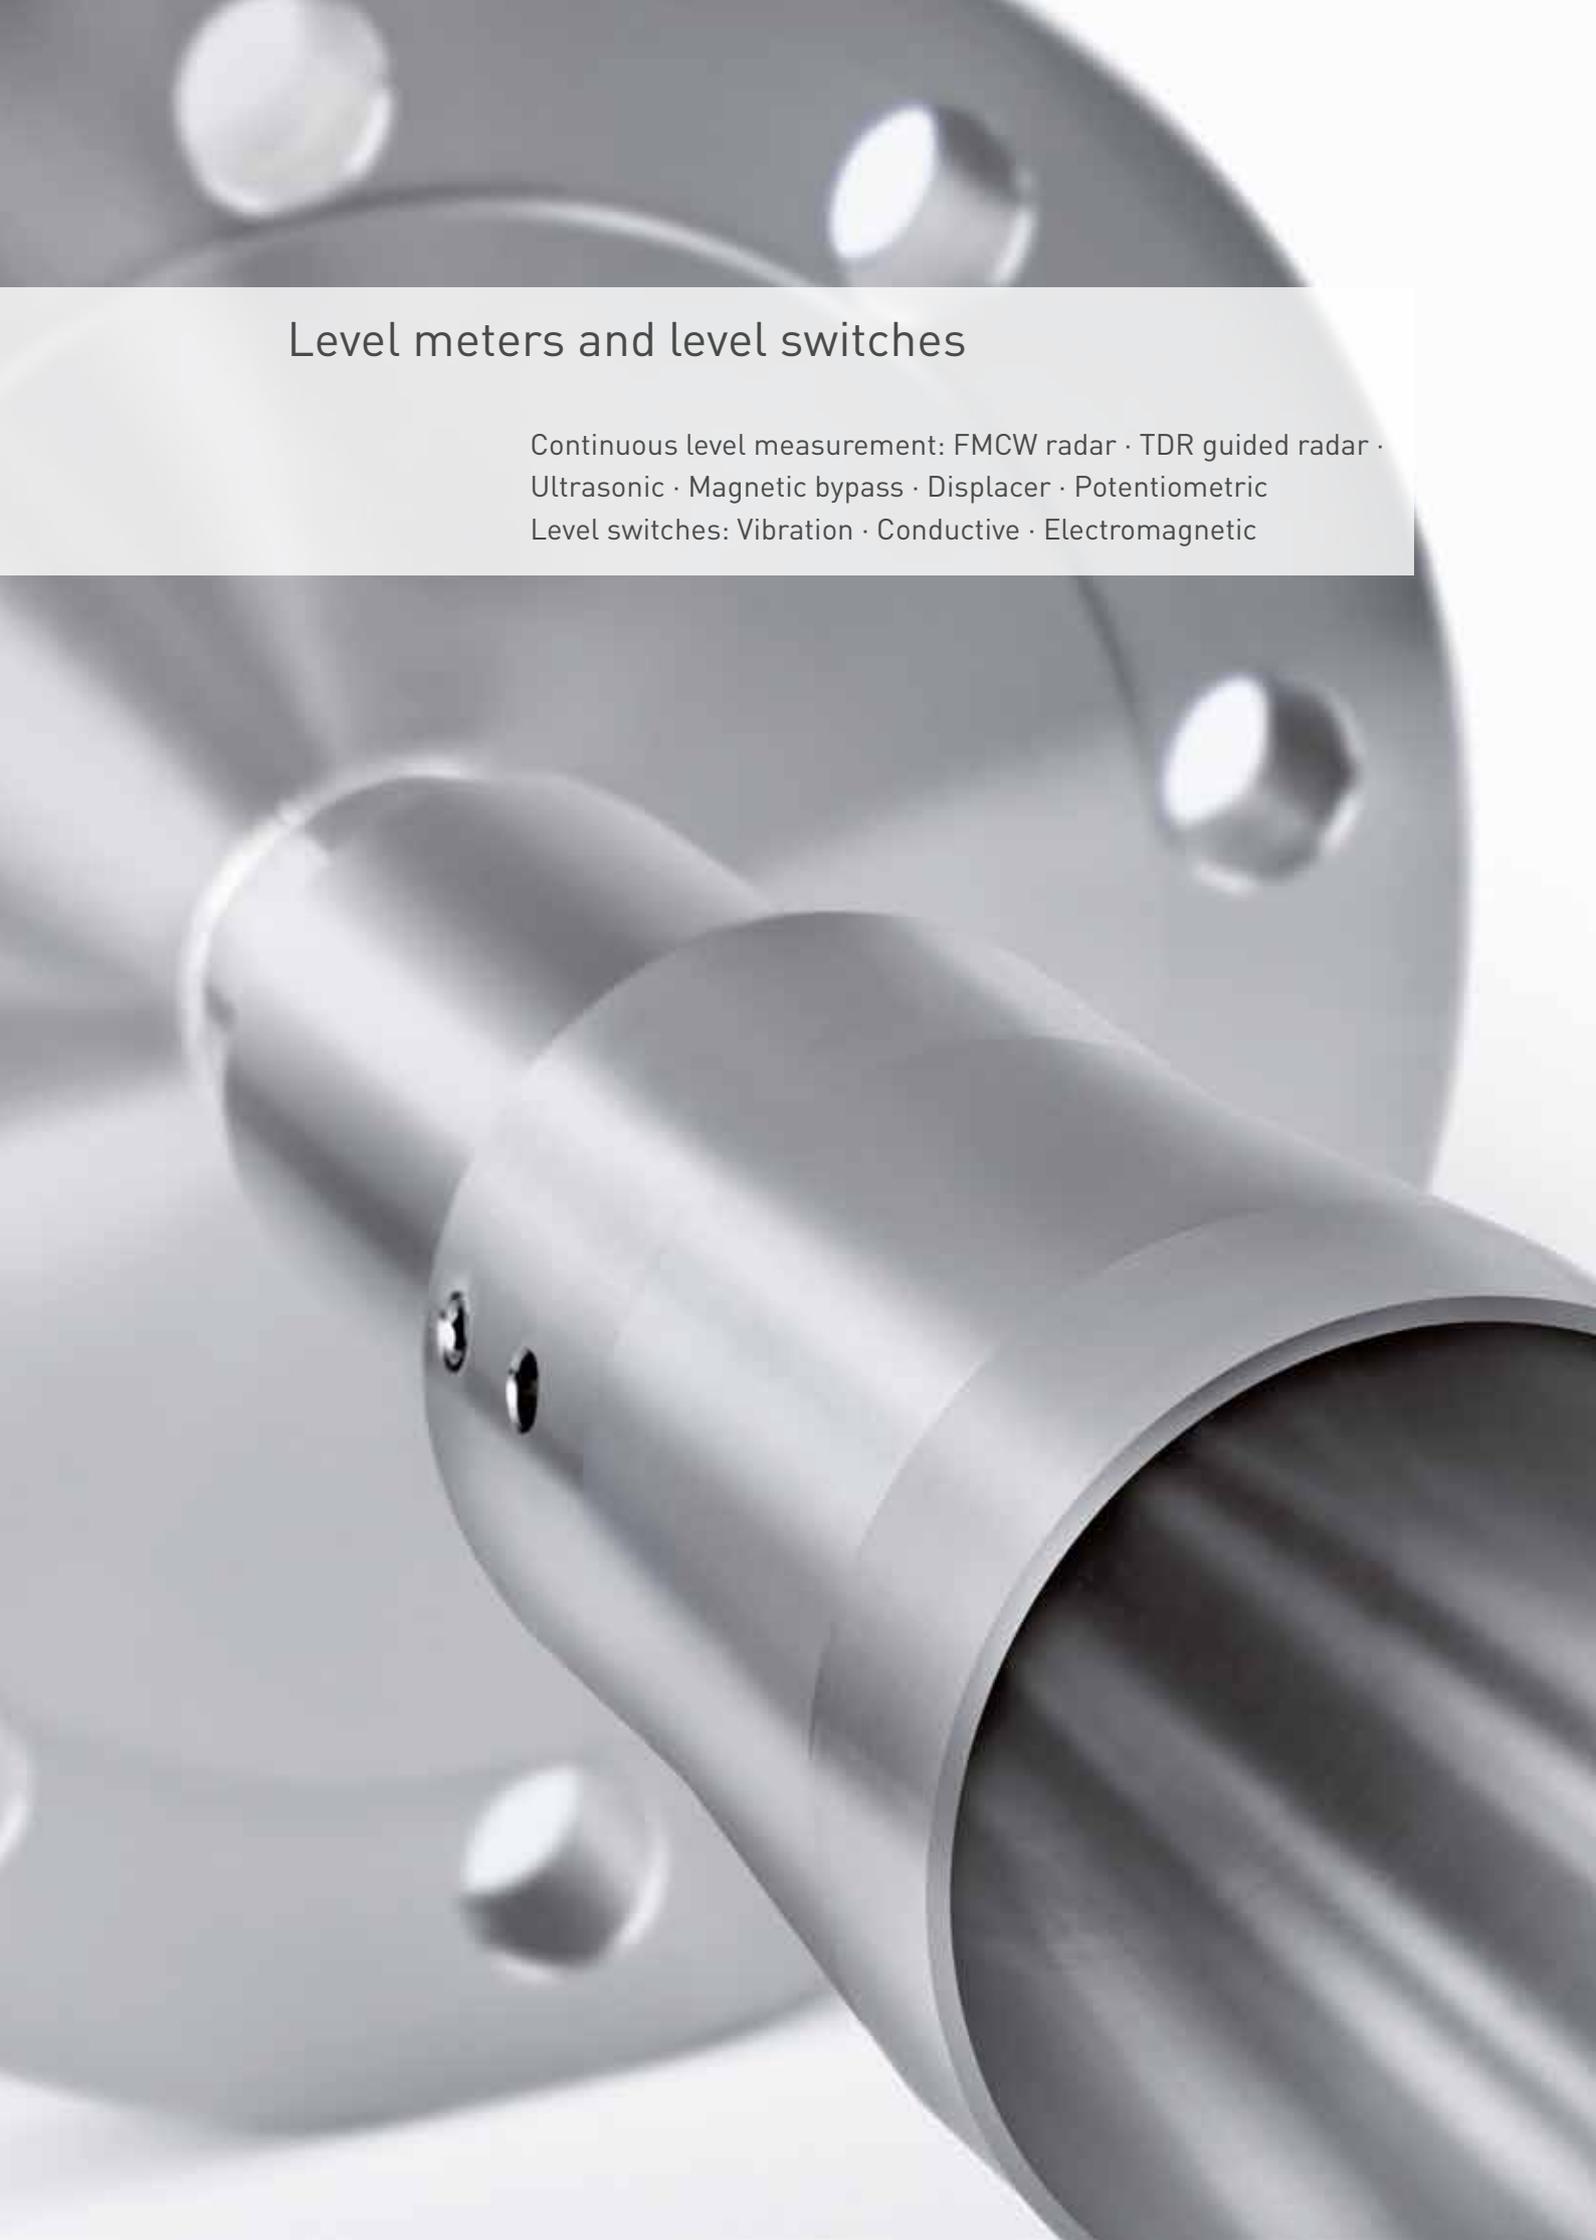

Level meters and level switches

Continuous level measurement: FMCW radar · TDR guided radar ·
Ultrasonic · Magnetic bypass · Displacer · Potentiometric
Level switches: Vibration · Conductive · Electromagnetic

For the highest level of quality: Level meters and level switches

KROHNE offers a comprehensive range of level meters and switches for liquids and solids.

Every KROHNE meter is calibrated individually and thoroughly tested before it is shipped. This ensures a consistent product quality and guarantees that the meters will work properly once they arrive. KROHNE meters use patented technology to deliver high performance and reliability and comply with a broad spectrum of industry standards and approvals.

KROHNE level meters are designed for use in the harshest process environments across a wide spectrum of industries all around the world. The expertise we have acquired over the years, covering the effects of installation and different media, and meter performance under real-world process conditions, adds value to every KROHNE meter you purchase.

Our product portfolio contains a wide selection of cost-effective level solutions, as well as solutions for high-temperature/pressure environments and use with dense vapours and highly viscous media. For customers with special requirements in terms of materials or mounting, we offer a tailor-made approach which often results in a lower total installed cost.

Over 50 years' experience:

1955

Production of mechanical level meters for measuring liquids in tanks and containers begins.

1989

KROHNE introduces the first FMCW radar level meter for process tanks, pioneering the use of radar level measurement technology in process applications.

1995

KROHNE launches the first TDR guided radar meter.

2000

KROHNE develops the first 2-wire FMCW radar device.

2004

The next quantum leap in level measurement comes with the OPTIWAVE and OPTIFLEX series, a new generation of non-contact and guided radar devices with a unique wizard-driven operating concept.

2009

Introduction of the innovative Drop antenna for OPTIWAVE. Its ellipsoidal shape prevents from product deposits in dusty or humid atmospheres.

2012

Modular housing concept with bayonet locking system for OPTIFLEX.

2013

Unique PP/PTFE Wave Horn antennas for OPTIWAVE in corrosive environments.

Continuous level measurement: FMCW non-contact radar



Frequency modulated continuous wave (FMCW) radar emits a high frequency signal which is reflected from the product surface and received back. These meters allow for the continuous, contactless level measurement of liquids, pastes, granulates, powders and other solids in a wide variety of industries:

- Chemical & petrochemical: solvents, chlorine, resins, fertilizers (urea), liquefied gas, hydrocarbons, plastics, asphalt (bitumen), acids, bases
- Energy: hydrocarbons, coal, fly ash, biogas, cooling water in power plants
- Food & beverage: syrup, animal feed, juice, spirits, sugar, sodium carbonate, flour, cereals, coffee, chocolate, yeast
- Iron, steel & metal: molten steel, iron-disulphide, ore, coke
- Marine: cargo, ballasts
- Minerals & mining: stone, gravel, sand, lime, cement, concrete, gypsum, calcium carbonate, clinker, coal
- Oil & gas: hydrocarbons, liquefied gases, tank farms
- Pharmaceutical: alcohol, high purity water, solvents, various raw materials
- Pulp & paper: binding agents, wood chips, pulp moulding, titanium oxide
- Water & wastewater: potable, sea and river water, sewage, biological waste

Highlights:

- Distance, level, volume and mass measurement
- Not affected by fixed or moving inserts/agitators
- Large choice of antennas, eg. PP or PTFE Wave Horn antennas for corrosive mediums
- Drop antenna made of plain PP or PTFE: its ellipsoidal shape and non-adhesive surface prevents from product deposits in dusty or humid atmospheres.
- Suitable for high and low process pressure/temperature applications
- Modular design from mechanics to converter
- Metaglas® dual process sealing system for dangerous products

Typical applications include:

- Reaction vessels
- Silos, bunkers and stockpiles for solids
- Leakage monitoring near pipelines/vessels
- Storage and production of toxic or corrosive liquids
- Storage of liquefied gases in high pressure/low temperature spheres
- Hygienic process applications
- Flow measurement in open channels with pre-shaped flumes and weirs



BM 702 A
2-wire FMCW radar
for simple applications



OPTIWAVE 5200 C
2-wire FMCW radar
for liquid applications



OPTIWAVE 5200 F remote version
2-wire FMCW radar
for liquid applications



OPTIWAVE 6300 C/
Drop antenna
2-wire FMCW radar for
solid applications



OPTIWAVE 6300 C/7300 C/
Drop antenna
2-wire FMCW radar with
flange plate protection for
corrosive media



OPTIWAVE 7300 C/Horn antenna
2-wire FMCW radar for
liquid applications



OPTIWAVE 8300 C Marine
2-wire FMCW radar for marine
applications marketed through our
KROHNE Skarpenord sales office



OPTIFLEX 1100 C
2-wire TDR guided radar
for storage or standard
process applications



OPTIFLEX 2200 C
2-wire TDR guided radar for
solid and liquid applications



OPTIFLEX 2200 F remote version
2-wire TDR guided radar for
solid and liquid applications



OPTIFLEX 1300 C
2-wire TDR guided
radar for solid, liquid and
interface applications



OPTIFLEX 4300 C Marine*
2-wire TDR guided
radar for marine and
offshore applications

Continuous level measurement: TDR guided radar

TDR radar (Time Domain Reflectometry) emits electromagnetic pulses which are transmitted along a rigid or flexible conductor before being reflected from the product surface and received. It allows for continuous level measurement of liquids, pastes, granulates, powders and liquid interface in industries which include:

- Chemical & petrochemical: fertilizers (ammonia), solvents, carbon dioxide, hydrocarbons, liquefied gases, plastics, bitumen emulsion
- Energy: hydrocarbons, coal powder, fly ash
- Food & beverage: animal feed, recycled cooking oil, coffee peel
- Iron, steel & metal: ore, cooling water, hydraulic oil
- Marine: cargo, ballasts
- Minerals & mining: mineral powders (cement, coal, alumina, talc, salt), sand, perlite
- Oil & gas: water/hydrocarbon interface, liquefied gases
- Pharmaceutical: solvents, alcohol and intermediate products
- Pulp & paper: binding agents, wood chips, saw dust
- Water & wastewater: potable, sea and river water

Typical applications include:

- Crude oil distillation in extraction vessels
- Storage of liquefied gases in high pressure/low temperature spheres
- Storage of raw materials and intermediates in bulk solid containers
- Separation of liquids
- Rag layer detection in impounding basins
- Condensation vessels for liquids and gases
- Storage of raw and finished products in tank farms of refineries
- Rock crushers, hoppers
- Water towers, basins and reservoirs
- Tide level, flood warning

Highlights:

- Distance, level, volume, mass and/or interface measurement
- Not affected by process conditions: dust, foam, vapour, agitated or boiling surfaces, changes in pressure, temperature and density
- Suitable for high and low process temperature/pressure applications
- Converter can be rotated and removed under process conditions
- Metaglas® dual process sealing system for dangerous products
- Modular design from mechanics to converter





Continuous level measurement: Ultrasonic

This particular meter type emits ultrasonic pulses which are reflected from the product surface and received. It is suitable for continuous, non-contact level measurement of liquids and solids in the following industries:

- Chemical: acids, bases, plastics
- Water & wastewater: potable, sea and river water, sewage

Typical applications include:

- Non-contact flow measurement in open channels
- Level of solids in silos and storage tanks
- Slightly corrosive acids and lies
- Hazardous areas
- Sumps, water and wastewater basins

Highlights:

- Integrated temperature sensor for velocity compensation
- Unaffected by product properties
- Set-up without medium
- Gas and dust approvals for hazardous areas
- Highly resistant materials for acoustic signal transducers and process connections



OPTISOUND 3010
2-/4-wire ultrasonic level
meter for small tanks



OPTISOUND 3020
2-/4-wire ultrasonic level meter
for small and medium-sized tanks



OPTISOUND 3030
2-/4-wire ultrasonic level
meter for medium-sized tanks

Magnetic bypass



BM 26 BASIC/
ADVANCED
Magnetic bypass
level indicator (MLI)
for liquid applications



BM 26 A
Magnetic bypass
level indicator (MLI)
for liquid and interface
applications



BM 26 F
2-wire TDR guided
radar in a reference
chamber for liquid and
interface applications



BM 26 W
2-wire FMCW radar
on magnetic bypass
level indicator (MLI)
for liquid applications

Displacer



BW 25
For liquid level and
liquid-liquid interface
measurement, suited
for high temperature/
pressure applications

Potentiometric



BM 500
4-wire,
potentiometric

Continuous level measurement:

Magnetic bypass

Magnetic bypass float level meters are based on the principle of communicating vessels and allow for a continuous level or interface measurement of liquids.

Typical applications include:

- Chemical industry: suitable for safety-related applications – flammable, toxic and corrosive mediums, liquids in low pressure storage and process tanks
- Oil & gas, petrochemical industries: measuring the level of hydrocarbons in refining applications

Displacer

Based on the Archimedes or displacer principle, these meters measure level and separating layers of liquids.

Typical applications include:

- Chemical & petrochemical industries: hydrocarbons, solvents, bases
- Energy, power generation: steam generator, water

Potentiometric

Potentiometric meters measure the potential difference in voltage between a working and a reference electrode and enable level measurement independent of medium properties.

Applications in the food & beverage, pharmaceutical industries:

- Small tanks and hygienic applications
- Tough, pasty or strongly adhesive media

Highlights of magnetic bypass:

- Robust stainless steel design also for use in extreme process conditions
- Hermetically sealed (IP68), easy to read local indication
- Variety of process connections, special materials, valves, insulation
- Analogue transmitters (FF/PA/HART®) with optional display
- Adjustable, clamp-on limit switches
- Local float failure indication
- Ex and PED-compliant

Highlights of displacers:

- Suitable for use in extreme process conditions, e.g. high pressure/temperature liquids
- Reference vessel available for bypass installation
- Modular design, retrofitting under process conditions is possible
- Converter/indicator scale are mechanically sealed from the process

Highlights of potentiometric meters:

- Not sensitive to adhesives and foam
- Defined empty reporting function
- Quick response time
- Automatic position detection
- Resistant to high temperatures (CIP/SIP)

Highlights of vibration switches:

- Unaffected by process conditions
- Rugged oscillating fork, high abrasion resistance
- Reproducible switching point without adjustment
- Continuous self-monitoring of correct oscillating frequency, corrosion and cable breakage to the piezo drive
- Hygienic design with polished surface
- Recurring test acc. to WHG via test button (with SU 501)
- Functional safety: up to SIL 2 in a single channel architecture and up to SIL 3 in a multiple channel, redundant architecture

Highlights of conductive switches:

- Different hygienic process connections for a hygienic, dead zone-free installation
- The sensitivity of the probe can be switched over via control cable for changing mediums with widely differing conductivity
- Stainless steel or coated probe rods available; not sensitive to foam and adhesions
- Compact or remote version
- Stub, rod or multi-rod electrodes
- Probes can be shortened as needed

Highlights of electromagn. switches:

- Measurement independent of media properties
- Not sensitive to adhesives and foam, condensate or build-up of deposits
- Hygienic installation by means of a hygienic process weld sleeve, nearly flush with the front
- Dry-run protection beyond a nominal width of DN 15
- Not affected by vibration

Level switches:

Vibration

Vibration switches indicate the presence of liquid or solids when the medium comes in contact with their vibrating forks and dampens their oscillation.

Typical applications include:

- Applications with heavy dust build-up and mechanical stresses
- Light bulk goods
- Pump dry-run protection
- Limit and overflow detection
- Liquid detection in pipes
- Detecting solids in water

Conductive

In liquid applications, conductive level switches indicate the change of resistance as soon as their electrodes are covered with medium.

Typical applications include:

- Hygienic applications in the food & beverage and the pharmaceutical industry, e.g. level detection or dry-run protection

Electromagnetic

An electromagnetic switch uses the phase shift that electromagnetic waves experience when emitted to a medium. It is suitable for level detection for liquids and pastes or as a dry-run protection.

Applications in the food & beverage, pharmaceutical industries:

- Small tanks and hygienic applications
- Tough, pasty or strongly adhesive media

Vibration



OPTISWITCH 3000
Vibration level switch
for solids



OPTISWITCH 4000
Vibration level switch
for liquids for simple
applications



OPTISWITCH 5000
Vibration level switch
for liquids for process
applications

Conductive



LS 72XX
Conductive switch
with one to four switches

Electromagnetic



LS 6500
Electromagnetic switch



LS 6600
Electromagnetic switch

Temperature meters

Thermometers · Transmitters



A new degree of contact: Temperature meters

KROHNE thermometers and transmitters are as versatile as your requirements and specific applications need them to be.

Our OPTITEMP line covers a wide range of electrical temperature instruments for industrial temperature measurement. Alongside standard applications, they are also ideal for high temperatures, extreme pressures or high flow velocities.

KROHNE INOR, a fully-owned subsidiary of KROHNE, has been designing and producing temperature measurement equipment for over 70 years. Located in Malmö, Sweden, KROHNE INOR is today one of the world's leading manufacturers of temperature signal transmitters, specialised in industrial temperature measurement.

Building on this specialist knowledge and experience, KROHNE INOR is successfully expanding global production.

Over 70 years' experience:

1940

INOR is started as a family-owned company working with process instrumentation.

1965

Development of the first temperature transmitter.

1974

INOR presents world's first head-mounted transmitter.

2006

KROHNE acquires INOR.

2010

First temperature transmitter with dual sensor input in 4-wire connection.

2011

Temperature transmitter with SmartSense insulation resistance monitoring to detect cracks in the thermowell is developed.

Thermometers

KROHNE has a wide portfolio of standard pre-fitted thermometers for solid, liquid, gaseous and steaming mediums. We can also provide you with systems that are custom-made for your specific requirements.

Typical applications include:

- Chemical industry: measurement of liquids, gases and solids, acids and alkalis, abrasive or corrosive mediums in pipes, vessels and reactors
- Iron & steel industry: measurement in production and during the thermal treatment of steels, gas and ovens, as well as cooling mediums temperatures
- Power generation: steam and flue gas, as well as measurements of cooling mediums and bearing temperatures
- Hygienic applications: production and cleaning processes according to the stringent requirements of GMP, FDA, EHEDG and others

Depending on process conditions – temperature, pressure, flow velocity and medium properties – we will recommend an appropriate thermometer and the materials to use. We will then support you when it comes to choosing the right combination of thermowell and sensors/measuring inserts for your application – resistance (RTD) or thermocouple (TC).

Used in combination with the correct insert, head and neck pipe, our range of thermowells will ensure maximum process certainty.

Highlights of thermometers:

- Various process connections: insert, screw-in/threaded, flanged, weld-in, compression fittings, coatings and covers, gas-tight threaded sleeves, sliding flange
- Standardised and customer-specific thermometers
- Replaceable spring-loaded measuring inserts made from mineral isolated cable, durable, with low drift and high resistivity against any mechanical load
- Connection heads for a wide variety of requirements
- Extensive range of accessories

Highlights of thermowells:

- Reduced and tapered tips for faster response
- Wide range of materials
- Additional PTFE or tantalum coating for use in conditions like exposure to a high level of chemicals
- Corrosion and abrasion-resistant versions
- Individual stress calculations
- Various test and examination certificates available, including pressure test, PMI test, X-ray test, ultrasonic test, dye penetration test



OPTITEMP TRA P10
Insertion-type
thermometer for
universal applications



OPTITEMP TRA F13
Flange thermometer
with straight tip




OPTITEMP TRA S41
Threaded thermometer
with reduced tip



OPTITEMP TRA F42
Flange thermometer
with tapered tip



OPTITEMP TRA T30
Weld-in thermometer
with bar stock
thermowell

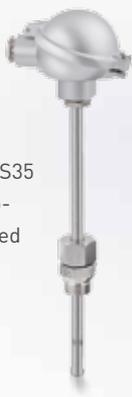

OPTITEMP TRA TS35
Threaded thermo-
meter for advanced
requirements



OPTITEMP TCA P62
Flue gas thermometer



OPTITEMP TCA P63
Thermometer with
holding tube for
high temperatures



OPTITEMP TRA S50
General purpose
thermometer without
thermowell



OPTITEMP TRA TF56
Heavy duty flange
thermometer for oil
& gas applications



OPTITEMP TRA TS53
Threaded with bar
stock thermowell
according to ASME
standard



OPTITEMP TRA V20
Room sensor for
heating, ventilation
and air conditioning
applications



OPTITEMP TRA W40
Surface cable sensor
for high temperatures



OPTITEMP TCA M50
MI-sensor



OPTITEMP TRA W70
Bayonet cable sensor
for measurement on
moving parts

Highlights:

- Analogue temperature transmitters for basic applications
- Digital, universally programmable state-of-the-art transmitters for demanding applications
- Fits any B-connection head and on DIN rail
- Excellent measurement accuracy with high precision, long-term stability and low temperature drift
- HART® 6 compatible transmitters
- PROFIBUS® interface available
- Diagnostic functions for high process safety: monitoring of isolation resistance (SmartSense), sensor drift, sensor breakage and short circuit
- Dual sensor input TC and RTD, 2-, 3- and 4-wire (4-wire on OPTITEMP TT 51 R only) with automatic back-up in case of sensor failure (redundancy)
- High galvanic isolation
- NAMUR compliance: NE 21/NE 43/NE 53/NE 89/NE 107
- 10-g vibration resistance
- 50-point individual sensor linearisation
- Communication options: PC, FC375/475, AMS, PDM, EDD, DTM
- Ex-approval acc. to ATEX Ex i and Ex n (non-incendive) approvals
- SIL 2 (acc. to IEC 61508)
- Configuration via PC without external power supply

Temperature transmitters

In 1974, INOR launched the world's first temperature transmitter which could be built into the connection head of a thermometer to convert the sensitive thermometer signal into a stable, noise-immune signal directly at the measuring point.

KROHNE INOR has an extensive programme, based on years of experience developing transmitters, covering low to high-performance accuracy, fail-safe measuring that fits into all kinds of applications in the process industries.

Typical industries include:

- Machine-building industry
- HVAC applications
- Energy & power generation
- Petrochemical
- Oil & gas





OPTITEMP TT 10 C, TT 10 C Ex OPTITEMP TT 10 R
 Analogue, adjustable, 2-wire transmitters for Pt100 with current output



OPTITEMP TT 11 C OPTITEMP TT 11 R
 Analogue, adjustable 3-wire transmitters for Pt100 or Pt1000 with voltage output



OPTITEMP TT 31 R, TT 31 R Ex
 1 or 2-channel universal, programmable 2-wire transmitters for thermocouples and resistance thermometers with current output



OPTITEMP TT 40 C OPTITEMP TT 40 R
 Highly accurate, universal, programmable 2-wire transmitters for thermocouples and resistance thermometers with current output



OPTITEMP TT 32 R
 Universal, programmable 4-wire transmitter for thermocouples and resistance thermometers with current and voltage output

OPTITEMP TT 20 C
 Analogue, programmable 2-wire transmitter for Pt100 with current output



OPTITEMP TT 30 C, TT 30 C Ex OPTITEMP TT 30 R, TT 30 R Ex
 Universal, programmable 2-wire transmitters for thermocouples and resistance thermometers with current output

OPTITEMP TT 51 C, TT 51 C Ex OPTITEMP TT 51 R, TT 51 R Ex
 Highly accurate, universal, programmable 2-wire HART® transmitters for thermocouples and resistance thermometers with current output



OPTITEMP TT 60 C, TT 60 C Ex OPTITEMP TT 60 R
 Highly accurate, universal, programmable PROFIBUS® transmitters for thermocouples and resistance thermometers



Analysis products

SMARTSENS analytical sensors with integrated transmitter · Water analysis · Wastewater analysis · Analysis for hygienic applications · Analysis systems for the food & beverage industry



From analysis to the solution: Analysis products

KROHNE is your partner for all aspects of analytical instrumentation. From pH measurement in hazardous explosive atmospheres to inline analysis of protein, fat and lactose in hygienic applications: with the SMARTSENS, OPTISENS, OPTISYS and OPTIQUAD range of analytical devices and systems, KROHNE supplements the measurement of analytical parameters. Our main goals are attaining sturdiness, reliability and quality in the various application areas.

We will gladly assist you in the search for the optimum solution to your measurement task. Should it be necessary to specifically design a measuring system according to your requirements, we are able to modify our systems in line with your needs and include additional components.

Milestones:

2005

First presentation of analysis instruments for the water industry.

2008

Launch of complete portfolio with digital analysis sensors for wastewater treatment plants featuring integrated sensor spray cleaning with air or water.

2008

Launch of turbidity measuring system with unique cuvette calibration and ultrasonic cleaning for easy calibration and low maintenance costs.

2010

KROHNE is the first manufacturer to offer a standardised operating and service concept for both flow-meters and analysis instruments.

2011

First inline spectroscopic analysis system with up to four measuring principles.

2012

OPTISENS range of sensors is expanded with sensors specially suited for food & beverage processes.

2013

KROHNE introduces SMARTSENS: the first digital sensor portfolio with integrated transmitter technology and direct connection to control system via 4...20 mA/HART®.

SMARTSENS analytical sensors with integrated transmitter technology

Introduced in 2013, SMARTSENS is the first family of analytical sensors that no longer require transmitters: KROHNE miniaturised the transmitter and fitted it into the sensor head. SMARTSENS sensors significantly reduce the risk of failure from sensor to process control system and ease the handling of analytical sensors in a revolutionary way.

Any SMARTSENS sensor can be connected directly to the process control system, featuring direct communication via 4...20 mA/HART[®] 7 protocol, the open standard in fieldbus systems. Sensor configuration is possible via PACTware[™] (FDT/DTM) or a handheld device with HART DD. SMARTSENS sensors function in a 2-wire loop powered system. They can be used both in point-to-point operation and for multi-drop installations. Up to 64 sensors can be connected in a loop of more than 1000 m in length.

For offline calibration, the sensor can be connected directly to a PC running PACTware[™] (FDT/DTM), using just one cable for bi-directional HART[®] 7 communication and power supply. Due to the controlled, clean conditions in the laboratory, a much more exact calibration can be performed. This enables more precise measuring results and higher product quality.

Each SMARTSENS sensor is specifically designed for its area of application: approvals and certificates range from installation in explosive (zone 0) to hygienic areas. A large portfolio of accessories, including loop powered displays, USB interface cable and mounting assemblies, ensures that SMARTSENS fits into your application.

Highlights:

- No external transmitter needed
- Direct communication via 4...20 mA/HART[®] 7
- VarioPin 2.0 plug connection
- 2-wire sensors for unrestricted use in hazardous areas with zone 0 approval (e.g. IECEx)
- Configuration and offline calibration via PACTware[™] with dedicated DTMs
- Consistent software and operating concept for handheld and PC
- SMARTBASE database for sensor data management and statistics
- Easy installation and retrofitting on site: sensors fit 98 % of all existing mounting assemblies

Measurement of pH value in chemical plant



pH/ORP sensors



SMARTSENS PH 8570
Hygienic pH sensor for food, beverage and pharma industry



SMARTSENS PH 8150
High performance pH sensor for chemical industry



SMARTSENS PH 9950
Liquid filled pH sensor for pure water or harsh applications



SMARTSENS PH 8530
pH sensor for pure water applications



SMARTSENS PH 8320
Durable pH sensor for water and wastewater applications



SMARTSENS PH 8510
General purpose pH sensor for water applications



SMARTSENS ORP 8150
High performance ORP sensor for harsh applications



SMARTSENS ORP 8510
General purpose ORP sensor for water applications



SMARTSENS PH 1590
Rugged pH sensor with 3/4" MNPT process connection and ceramic diaphragm for water applications



SMARTSENS PH 2390
Rugged pH sensor with 3/4" MNPT process connection and PTFE diaphragm for wastewater applications



SMARTSENS ORP 1590
Rugged ORP sensor with 3/4" MNPT process connection and ceramic diaphragm for water and wastewater applications



HART® handheld and VarioPin®
cables also available

Conductivity sensors



SMARTSENS COND 1200
Conductivity sensor for general purpose water applications



SMARTSENS COND 3200
Conductivity sensor for pure water applications



SMARTSENS COND 5200
Conductivity sensor for harsh applications



SMARTSENS COND 7200
Conductivity sensor for hygienic applications

Accessories



SMARTMAC 200 W
Loop powered display for configuration and calibration with logbook function



SD 200 W/R
Loop powered display for wall or rack mount



SMARTBRIDGE
USB interface cable for offline calibration



SJB 200 W
Junction box for connecting the sensor with the process control system

Mounting assemblies



SENSOFIT RAM 5810/5830
Automatic retractable assemblies (pneumatic) for demanding process conditions in chemical industry



SENSOFIT RET 5810/5830
Manual retractable assemblies for easy exchange without process interruptions



SENSOFIT INS 1310
Static insertion assemblies for reliable connection to tanks and pipes in general purpose applications



SENSOFIT INS 7311/7312
Static insertion assemblies for reliable connection to tanks and pipes in hygienic applications



SENSOFIT IMM 2925
Immersion assemblies for installation in tanks and open basins



SENSOFIT FLOW 1710
Flow-through assemblies in stainless steel and PVDF for all applications

Water analysis

In many industrial processes, reliable water treatment is essential for product quality and improving system safety and efficiency. Water circulation systems becoming contaminated can cause enormous damage and must be detected early by continuously monitoring relevant quality parameters.

In circulating steam or cooling systems, this monitoring avoids the possibility of damaging deposits building up which would lead to corrosion or local overheating. At the same time, continuous monitoring enables you to react immediately to any leaks. Monitoring filtration stages also guarantees the longterm high quality of feed water.

Potable water applications:

- Water quality/limit values monitoring
- Water quality monitoring in distribution network
- Process control water treatment
- Filter monitoring
- Disinfection control

Power plant – cooling water and boiler feed water applications:

- Quality control
- Process control water treatment
- Filter monitoring
- Backflushing control ion exchanger
- Dosing of biozides
- Protection of reverse osmosis (RO) membranes

Food & beverage (steam generation) applications:

- Process control water treatment
- Filter monitoring
- Backflushing control ion exchanger
- Dosing of biozides
- Protection of reverse osmosis (RO) membranes

Turbidity measurement for filter monitoring



The modular product line



MAC 100
Multiparameter converter



OPTISENS PH 8100
pH sensor with Pt100 for low-conductivity media and high temperatures



OPTISENS PH 8300
pH sensor with dirt-repellent PTFE diaphragm for wastewater, surface and process water



OPTISENS PH 8500
pH sensor with ceramic diaphragm for general water applications



OPTISENS PH 9X00
pH sensors with liquid KCl filling for special applications



OPTISENS ORP 8500
ORP sensor with large platinum ring for reliable and precise measurement in all water applications



OPTISENS PH/ORP 8X90
pH/ORP sensors with different diaphragm material for harsh applications



OPTISENS CL 1100
Low-maintenance, membrane-free gold electrode sensor for free chlorine, chlorine dioxide and ozon measurements in potable water



OPTISENS COND 1200
2-pole stainless steel sensor for conductivity measurements in all general applications



OPTISENS IND 1000
Reliable dirt-resistant sensor for inductive conductivity measurements suitable for wastewater

Mounting assemblies



SENSOFIT FLOW 1000
With optimised flow profile and easy installation



SENSOFIT INS 1000
In stainless steel for quick and cost-effective installation



SENSOFIT IMM 1000
In polymeric material for all applications with an excellent price-performance ratio

Measuring systems

OPTISYS CL 1100
Measuring system for free chlorine, chlorine dioxide and ozon with automatic sensor cleaning system for safe use and extended lifetime



OPTISYS TUR 1050
Turbidity measuring system with cost-effective cuvette calibration and automatic ultrasonic cleaning system



Wastewater analysis



MAC 100
Multiparameter converter



OPTISENS ADO 2000
Amperometric sensor for dissolved oxygen measurements with easy exchangeable electrode cartridge



OPTISENS ODO 2000
Low maintenance optical sensor for dissolved oxygen measurements, with automatic cleaning, no recalibration required



OPTISENS TUR 2000
90° scattered light sensor for turbidity measurements with NIR-LED for long-term stability and automatic cleaning

Measuring systems



OPTISYS SLM 2100
Optical measuring system for sedimentation profile measurement and continuous tracking of sludge blanket

Analysis for hygienic applications



MAC 100
Multiparameter converter



OPTISENS PH 8500 HYG
Autoclavable pH sensor with FDA conform materials



OPTISENS COND 7200
Conductive conductivity sensor with hygienic connection



OPTISENS IND 7000 *
Hygienic sensor for inductive conductivity measurements with EHEDG certificate

Mounting assemblies



SENSOFIT INS 7311/7312
Static insertion assemblies for reliable connection to tanks and pipes

*OPTISENS IND 7000 is also available as compact measuring system

Wastewater analysis

Measurement and control systems designed to the highest standards make it possible to run sewage treatment plants efficiently and keep costs down. In all areas of industrial or community wastewater treatment, KROHNE provides support for the optimisation of your processes:

Auxiliary materials like chemicals used in precipitation reactions or neutralisations, can be dosed as needed and energy costs can be reduced, for example, in aeration for the biological treatment stage.

You maintain threshold values and reduce sewage treatment fees.

Applications in wastewater treatment include:

- Inlet: monitoring influent values
- Primary clarifier: automatic wasting of primary sludge
- Biological treatment: aeration control
- Secondary clarifier: automatic wasting of sludge, prevention of sludge washout, post-precipitant dosage
- Outlet: monitoring of effluent values
- Determination of chemical oxygen demand (COD) in dairy wastewater

Analysis for hygienic applications

In biotechnology and pharma as well as in food and beverage processes, analytical measurements such as pH or conductivity are widely used for quality measurements and process control. OPTISENS range of sensors is now expanded with sensors specially suited for these applications, starting with pH sensors as well as conductive and inductive conductivity sensors. They are CIP/SIP cleanable, feature hygienic connections and approvals such as EHEDG and FDA.

Applications in biotechnology, pharma, food and beverage include:

- Process control of biotechnological and pharmaceutical fermentation processes
- Process control in the production of cheese, milk, beer, fruit juices, yogurt
- Pure water and ultrapure water monitoring
- Separation processes (milk/water)
- Distillation
- Product control (dairies, breweries, beverages)
- CIP/SIP processes

Inline analysis systems for the food & beverage industry

Highlights:

- Direct inline process measurement, no bypass
- Continuous measurement for precise process control
- Eliminates the need for sampling, sample transport and preparation
- No operating costs for chemicals, reagents and cleaning agents
- Up to four optical principles and up to twelve wavelengths: excellent measuring performance, even with mediums with a wide variety of composition
- No moving parts: reduced maintenance
- Operating unit in IP65 housing with touch-screen for simple, hygienic operation
- High quality stainless steel design
- High precision and long-term stability
- Cleaning with standard process cleaning treatment, e.g. CIP/SIP or compressed air (in COD applications)
- Standard VARINLINE® measuring section
- Optional water cooling for high ambient or process temperatures
- Integrated sampling valve for (re-) calibration on site without interrupting the process

Spectroscopic analysis systems use illuminants to emit light of different wavelength into a medium. By using up to four optical principles the reflected light will be measured and processed to provide information about the medium composition.

OPTIQUAD spectroscopic analysis systems can be installed directly in the process without the need for a bypass. Depending on the application, OPTIQUAD uses up to four optical principles of spectroscopic analysis: transmission, scattering, fluorescence and refraction of light. It allows for:

- Continuous, non-contact measurement of protein, fat and lactose content in milk products
- Continuous, non-contact measurement of free fatty acids (FFA) content in deep fried oils in frying production
- Continuous measurement of chemical oxygen demand (COD) in the wastewater flow of dairies or cheese factories

Typical applications include:

- Set a constant ratio of fat to protein for a constant quantity of cheese per cheese producer
- Standardise fat content in drinking milk production
- Measurement and setting of the fat and protein content in the production of UHT milk and evaporated milk
- Monitor FFA value and control maximum FFA value
- Minimise usage of fresh oil in production of fried snacks, fish, meat, French fries or vegetables
- Measure highest COD loads directly in the wastewater flow

The modular product line

Operating unit



OPTIQUAD 4050 W
Wall-mounted with
IP65 housing

Analyser units



OPTIQUAD-M 4050 W
Continuous inline
measurement of
protein, fat and lactose
in milk products



OPTIQUAD-FFA 4050 W
Continuous inline
measurement of
free fatty acids (FFA)
in deep fried oils



OPTIQUAD-WW 4050 W
Continuous inline
determination of chemi-
cal oxygen demand (COD)
in dairy wastewater

Communication technology

Drivers · Protocols · Configuration · Diagnostics



Open for the future

PACTware™ and DTMs

PACTware™ is a manufacturer-independent tool based on FDT technology, providing device configuration and operation. It is free of charge.

DTMs are drivers for FDT-based systems. KROHNE DTMs are also available free of charge, without licence and without any functional restrictions.

KROHNE is committed to making communication convenient. Which is why our field devices communicate reliably with controllers, control systems and PCs, and can also be used for a variety of control and regulating tasks. They meet all of the prerequisites for integration into modern plant asset management systems, based on integration technologies such as DD/EDD and FDT/DTM.

We are a longstanding member of PACTware™ and the FDT Group®. Since 2003, we have made DTMs available for our field devices with HART®, PROFIBUS® or FOUNDATION™ fieldbus interfaces.

For remote monitoring of applications such as water metering, KROHNE has developed a GSM-based solution for online data transmission and logging.

So you will always have the information you need conveniently close to hand.




Clear and fast access to process and device data from any level

KROHNE DTMs are available for many field devices with HART®, FOUNDATION™ fieldbus or PROFIBUS® communication interfaces. They can be integrated into all FDT frame applications. KROHNE DTMs do not require any licence, providing full functionality free of charge.


Next to standard operating features, KROHNE DTMs provide additional information for commissioning and application engineers. For example, the DTM for OPTITEMP TT 51 temperature transmitter features:

- SmartSense function: monitoring of isolation resistance, sensor breakage and short circuit
- Configuration of dual-sensor input and sensor backup function
- Configuration of drift detection alarm when two sensors are connected


Together with PACTware™, KROHNE DTMs come alongside the device on a CD and can also be downloaded from KROHNE Download Centre at www.krohne.com

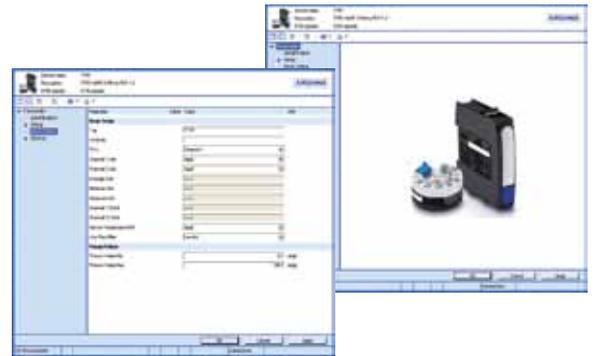

Configuration of OPTITEMP TT 51 temperature transmitter via PACTware™

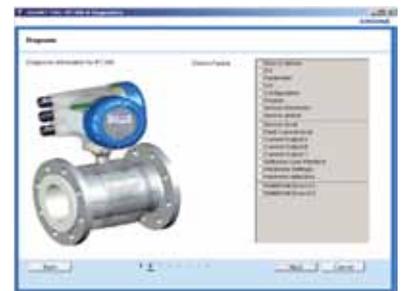

Diagnostic data are depicted in a graphical user interface indicating possible errors and symptoms related to device, application and accuracy faults. These are categorised with reference to a diagnostic classification scheme.

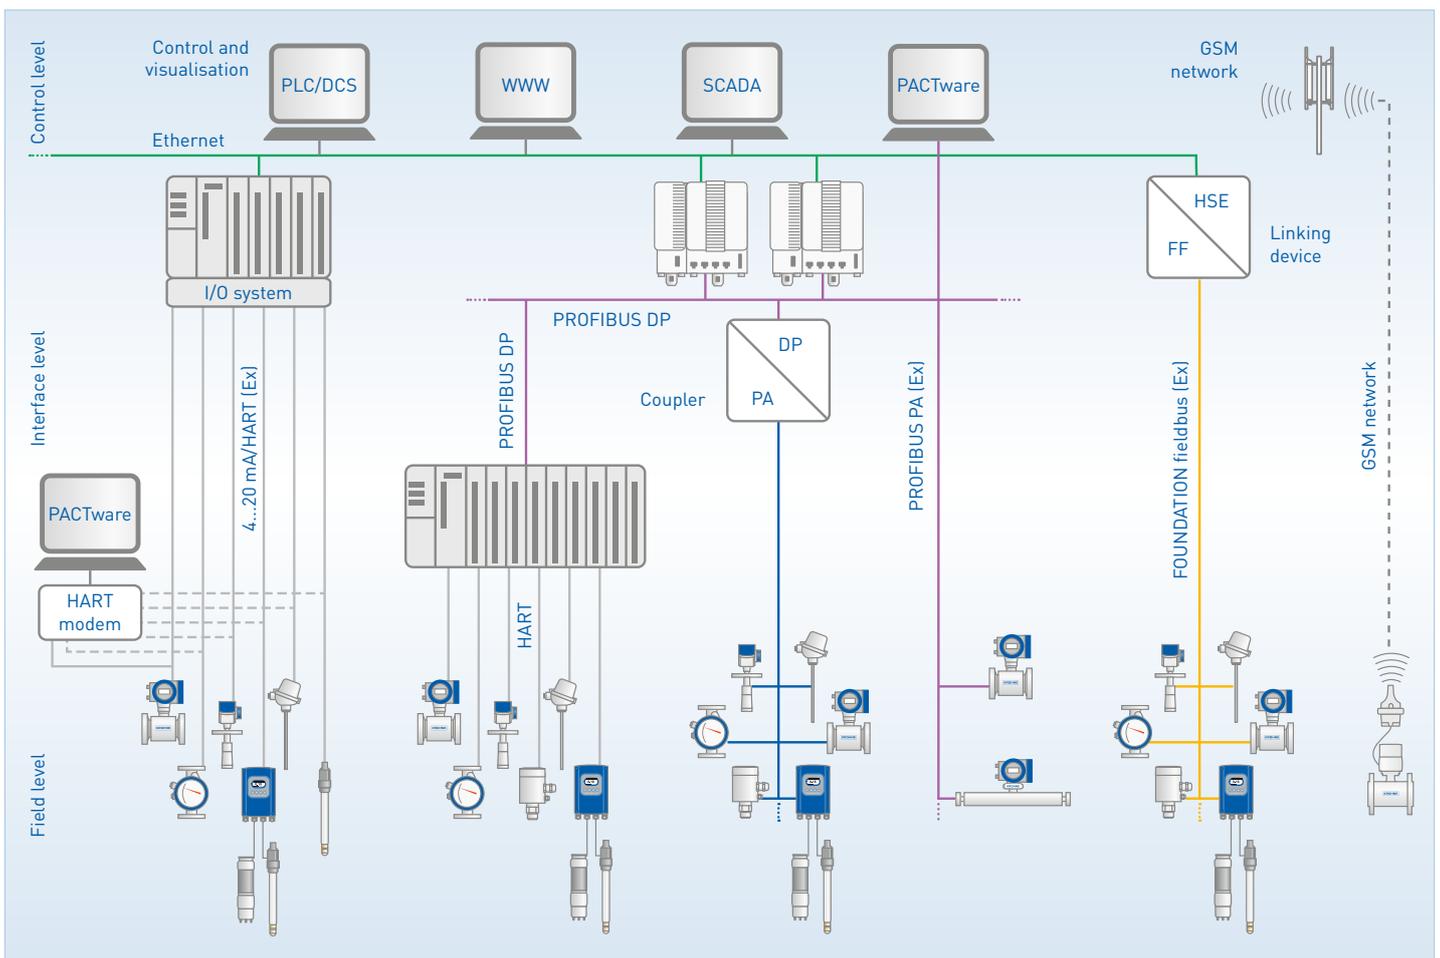

Products and systems for the oil & gas industry

Onshore · Offshore · Upstream · Midstream · Downstream



KROHNE
Oil & Gas

For all oil & gas inquiries,
please contact:

KROHNE Oil & Gas
Minervum 7441
4817 ZG Breda
The Netherlands
Tel.: +31 76 711 200 0
KOGinfo@krohne-oilandgas.com
www.krohne-oilandgas.com

From custody transfer flowmeters to complete solutions

From the well head, through pipelines, onto tankers and into the terminals and refineries, your oil & gas products need to be measured accurately and reliably. Which is where KROHNE Oil & Gas comes in.

Located in Breda, the Netherlands, close to Europe's major oil & gas centres, the growth of KROHNE Oil & Gas over the past 15 years has been particularly dynamic. Today we have one of the industry's largest teams of engineers solely dedicated to oil & gas.



ALTOSONIC V

Custody transfer flowmeters

KROHNE pioneers the most advanced technology available today. Performance monitoring and accuracy are leading features in our custody transfer meters. For more details, see pages 10 onwards for mass flowmeters and pages 12 onwards for ultrasonic flowmeters.

Liquid and gas metering systems

- Extensive experience in all sizes, categories, pressure and flow classes in all parts of the world and for all local and international regulations and specifications
- From metering runs to complete skid-based master-duty systems
- Custody transfer, allocation, fiscal metering
- Sampling systems, analytical & quality measurement systems



Liquid and gas metering systems

Provers, master meters, calibration systems

- From truck and trailer-mounted mobile tank and pipe provers to complete uni/bi-directional provers for verifying on-site
- Meter provers and master meter systems for on-site and off-site proving



Provers and calibration systems

Pipeline monitoring, leak detection and localisation

- PipePatrol, the most sensitive internal leak detection system available, provides very fast and accurate leak detection and localisation in pipelines
- Successfully implemented on gas and liquid pipelines throughout the world with major oil and petrochemical companies, thereby meeting or exceeding all applicable quality and performance regulations, such as the German TRFL and the American API 1130



Supervisory systems

Supervisory systems and flow computers

- SynEnergy hydrocarbon management system with integrated analyser management, metering supervisory and pipeline monitoring
- Predictive maintenance functions to reduce unnecessary work, expense, downtime and eradicate give-away
- SUMMIT 8800 flow computer with touch-screen user interface for multiple runs and on-board logging, trending and ticketing



SUMMIT 8800
flow computer

Measuring systems for the marine industry

Tank monitoring and alarm · Monitoring of fuel consumption and bunkering



© Væderhaug

KROHNE
Skarpenord

KROHNE Skarpenord – The marine centre of KROHNE

Based in Norway, KROHNE Skarpenord handles all marine-related activities within KROHNE. This includes sales and marketing, engineering and system design, research and development, after-sales, service and spare parts. Our highly knowledgeable team is always up-to-date with the newest technology and sailing installations.

The marine market is a global market without borders. More than 50 years in the marine business mean KROHNE Skarpenord knows what it takes to deliver high-quality products to demanding ship operators and yards anywhere in the world.

An exclusive network of sales representatives and service agents represent KROHNE Skarpenord in all the main global shipping hubs and shipbuilding countries.

For all marine inquiries,
please contact:

KROHNE Skarpenord
Stromtangveien 21
NO-3950 Brevik
Norway
Tel.: +47 35 561 220
support@krohne.no
www.krohne-skarpenord.com

Complete solutions for monitoring liquids onboard all kinds of ships

CARGOMASTER – The all-in-one tank monitoring system for tankers

The CARGOMASTER system offers complete solutions for tank monitoring and alarming. The system sends readings from all tanks and lines onboard to leading-edge, user-friendly software which runs on all standard marine computers.

The delivery of a CARGOMASTER system includes system software adapted to your individual vessel applications, engineering, drawings, documentation and commissioning.

So it's not surprising CARGOMASTER is installed on all kinds of vessels, from the smallest product tankers to the most complex chemical tankers and large VLCCs.

Fuel consumption monitoring

The EcoMATE system monitors fuel consumption and bunkering and can be set up to monitor and report consumption over a set time period or at regular intervals. OPTIMASS mass flowmeters are usually used for input into the system.



Heavy-duty stainless steel housing:
OPTIWAVE 8300 C Marine can
withstand roughest conditions on deck



KROHNE Skarpenord's global marine support network:

- Service stations
- Sales agents



KROHNE services

Engineering services · Online tools and services · Maintenance services ·
Quality · Training and seminars · Calibration



Beyond the highest requirements

For us, service starts at our first contact with you and lasts as long as the life of our systems installed at your plant.

Quality and reliability are key to maintaining the highest service standards. All KROHNE feeder factories are ISO 9001 certified. In fact, long before ISO 9000 existed, KROHNE was manufacturing to the highest industrial standards. Now certification exists in every factory to demonstrate that we not only fulfil ISO requirements but have passed the ISO certification procedure every three years since the standard was introduced.

But it's not simply a one-way process. We actively encourage companies like yours to participate in our research and development. Many of our products that are today considered the pinnacle of excellence were developed in cooperation with our customers.

Engineering services through all project stages

- Project management
- Control and asset management systems in project concept phase
- Basic engineering based on the specification required by the user
- Detail engineering phase
- Commissioning services
- On-site start-up and commissioning
- Product training (on-site)
- Calibration services

Proven quality

Before shipping, every meter is thoroughly inspected. This rigorous programme of specific measurements, tests and factory inspections is called KROHNE proved.

So, if you install and operate any KROHNE product by following our operating instructions correctly, problems shouldn't occur. If they do, we will provide you with all the technical support and service you need.

Choose from maintenance and service contracts tailored to suit all business sizes and needs:

- Spare parts and consumables
- Field service and on-site repair
- Returns
- Workshop repair
- Helpdesk

KROHNE Academy and KROHNE Academy online

The KROHNE Academy is a series of seminars organised in collaboration with leading automation companies aimed at plant engineers, operators and contractors across the process industries. It brings industry experts together to provide an insight into the various technologies, industrial standards and procedures that plant operators can find themselves faced with.

Taking place in various countries, KROHNE Academy seminars address key operating issues, from plant safety to ways of increasing plant efficiency and controlling costs, and show possible solutions. They also provide an ideal opportunity for you to speak to the experts and benefit from their vast application knowledge.

Learn more about KROHNE Academy at www.krohne.com

KROHNE Academy online is a free eLearning platform that contains audio enhanced, interactive Web Based Trainings. As with its on-site seminars, the online KROHNE academy learning material is vendor agnostic and not specific to individual products and/or industries. The main focus of each course relates to a measurement technology such as Variable Area, Vortex, Ultrasonic or Mass flow or to a more general topic such as the basics of gas measurement or pipeline leak detection.

Register now for free and start your training at <http://academy-online.krohne.com>

Please check www.krohne.com for your local service contact.

Additional online services:

(Find them at www.krohne.com)

- **Configure It**
Configure It is a highly advanced online configuration tool for standard devices offering free 2D/3D CAD data of KROHNE flow devices for planning engineers. It enables you to configure any KROHNE product to handle your application in a few simple steps.
- **KROVASYS 4**
Selection and calculation tool for variable area flowmeters.
- **Planning tool for water & wastewater industry**
The planning tool for wastewater treatment plants as well as water and wastewater applications for generating tender documents covering flow, level, analysis, pressure and temperature.
- **PiCK**
Get any information related to your KROHNE product from our dedicated online resource PiCK. Just enter your serial number, and key material like manuals, Quick Starts and calibration documents is at your fingertips.

Calibration from KROHNE: Certainty you can count on

Calibration is one of KROHNE's core areas of expertise. If you buy a KROHNE product, you will get a measuring device that performs most accurate with low uncertainty under real process conditions.


To achieve this, we operate more than 120 calibration facilities for volume flow, mass flow, level, temperature, density and pressure to (wet-)calibrate any device we manufacture. For example, every flowmeter is wet-calibrated using water or air as standard before leaving our facilities.

We can also provide customer specific calibration such as:

- Carry out multipoint calibrations
- Vary different parameters such as temperatures, viscosities, pressures etc.
- Use the actual medium or similar
- Build or emulate customer-specific flow geometries
- Use piping provided by the customer

For calibration we only use direct comparison of measurands (e.g. we calibrate our Coriolis mass flowmeters with a gravimetric weighing system). Our calibration rigs are the most accurate used in measuring device production worldwide: the accuracy of the reference is usually 5 to 10 times better than that of the meter under test.

The world's most precise volumetric calibration rig for flowmeters up to DN 3000/120"

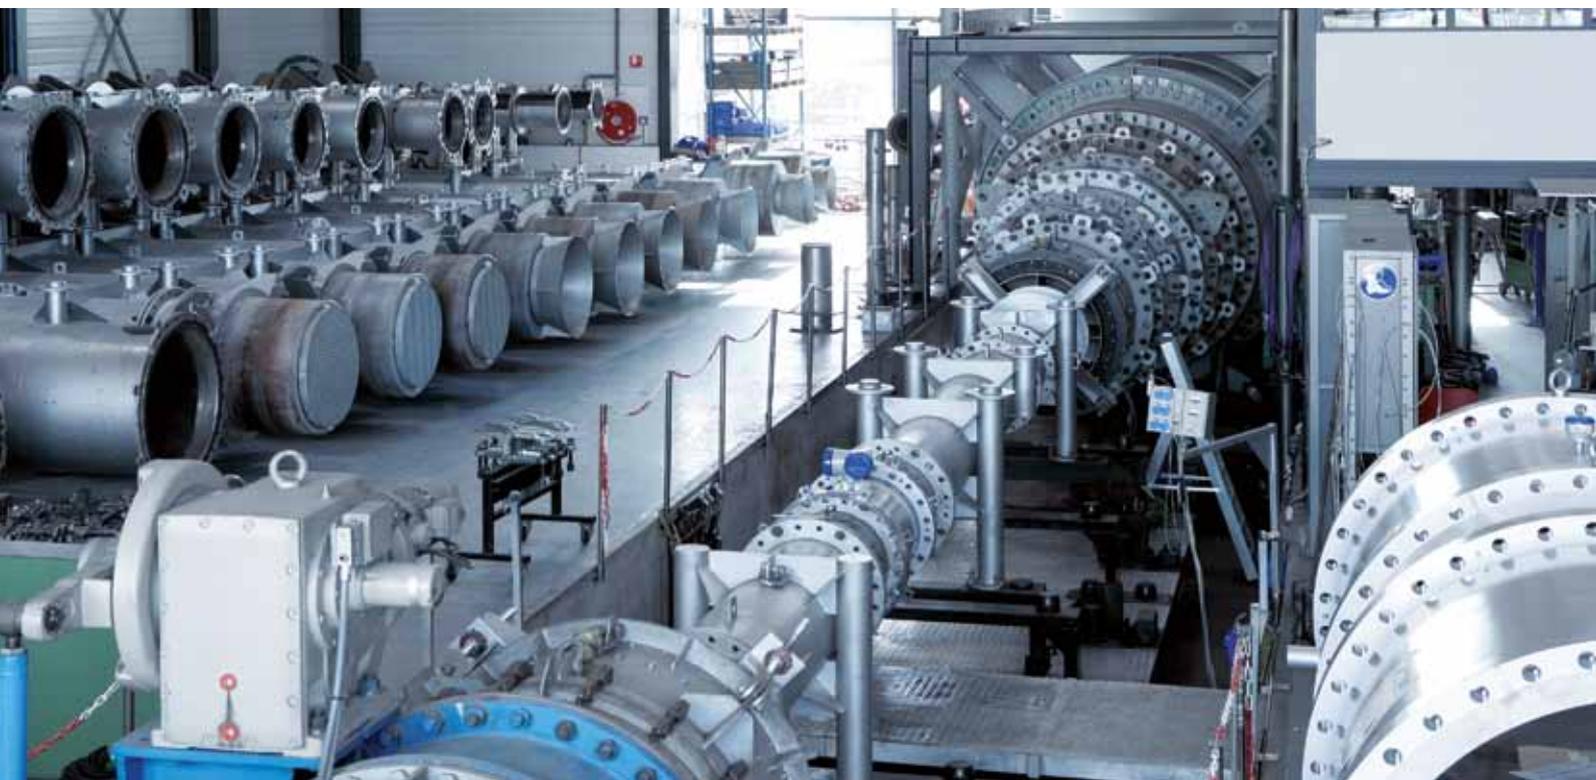



Stretch for calibration of FMCW level meters

Volumetric piston prover

This goes for small as well as for very large sizes: KROHNE operates the world's most precise volumetric calibration rig for flowmeters up to DN 3000/120" with a certified accuracy of 0.013 %. The reference vessel is a 44 m/144 ft high tank containing almost ½ million litres/132,000 gal (US) of water which allows for a maximum flow rate of 30,000 m³/h/7,925,000 gal (US)/h.

Certified technology for fiscal & custody transfer applications

Our meters can be calibrated and certified according to various standards such as OIML, API, Measurement Instruments Directive (MID 001, 002, 004, 005), GOST, etc. The standards we use for calibration are ISO/IEC 17025 accredited and traceable to international or national standards. Regular inspections by national metrology institutes, round robin tests and alignments with national and international metrological standards according to ISO 9000 and EN 45000 guarantee the quality and comparability of our calibration rigs. Staff performing the calibrations are trained and given regular re-trainings to ensure quality and continuity.



KROHNE product overview

- Electromagnetic flowmeters
- Variable area flowmeters
- Ultrasonic flowmeters
- Mass flowmeters
- Vortex flowmeters
- Flow controllers
- Level meters
- Temperature meters
- Pressure meters
- Analysis products
- Products and systems for the oil & gas industry
- Measuring systems for the marine industry



Contact

Head office:
KROHNE Messtechnik GmbH
Ludwig-Krohne-Straße 5
47058 Duisburg
Germany
Tel.: +49 203 301 0
Fax: +49 203 301 103 89
info@krohne.de

Global companies and representatives
The current list of all KROHNE contacts
and addresses can be found at:
www.krohne.com